


DEVELON



DEVELON

DX360LCA-7M

Crawler Excavator



Operating Weight – kg



Bucket Capacity 1.8 m³



Rated Power 280 HP / 1,900 rpm

Siam Sun Autosales CO.,LTD.

99 Song Khanong Subdistrict Sam Phran

District, Nakhon Pathom Province 73210

sales.admin@siamsunautosales.com

Tel. +66 81 378 5151

www.siamsunautosales.com




Develon XGMA by Siam Sun



[siamsunautosales](https://www.tiktok.com/@siamsunautosales)



Develon XGMA by Siam Sun



@siamsun




@siamsun

DX360LCA-7M

Crawler Excavator

SPECIFICATION


Description	Unit	
Bucket Capacity	m³	1.8
Battery		2 X 12 V / 150 Ah
Starter Motor		24 V / 6 kW
Engine		
Model	-	Develon DX12 (Direct Injection)
Engine Type		4-stroke, 6-cylinder, 2-valve controller per cylinder. Teltel Theater headquarters with turbo.
Rated power	HP / rpm	280 / 1,900
Max. torque	kgf.m / rpm	1,275 / 1,500
Max. Travel Speed	km/h	3.0 / 5.3
No. of Cylinders & Stroke		6
Displacement	cc	7,640
Fuel Tank Capacity	Liter	600
Cooling System	Liter	66
Engine Oil	Liter	31
Hydraulic Tank	Liter	380

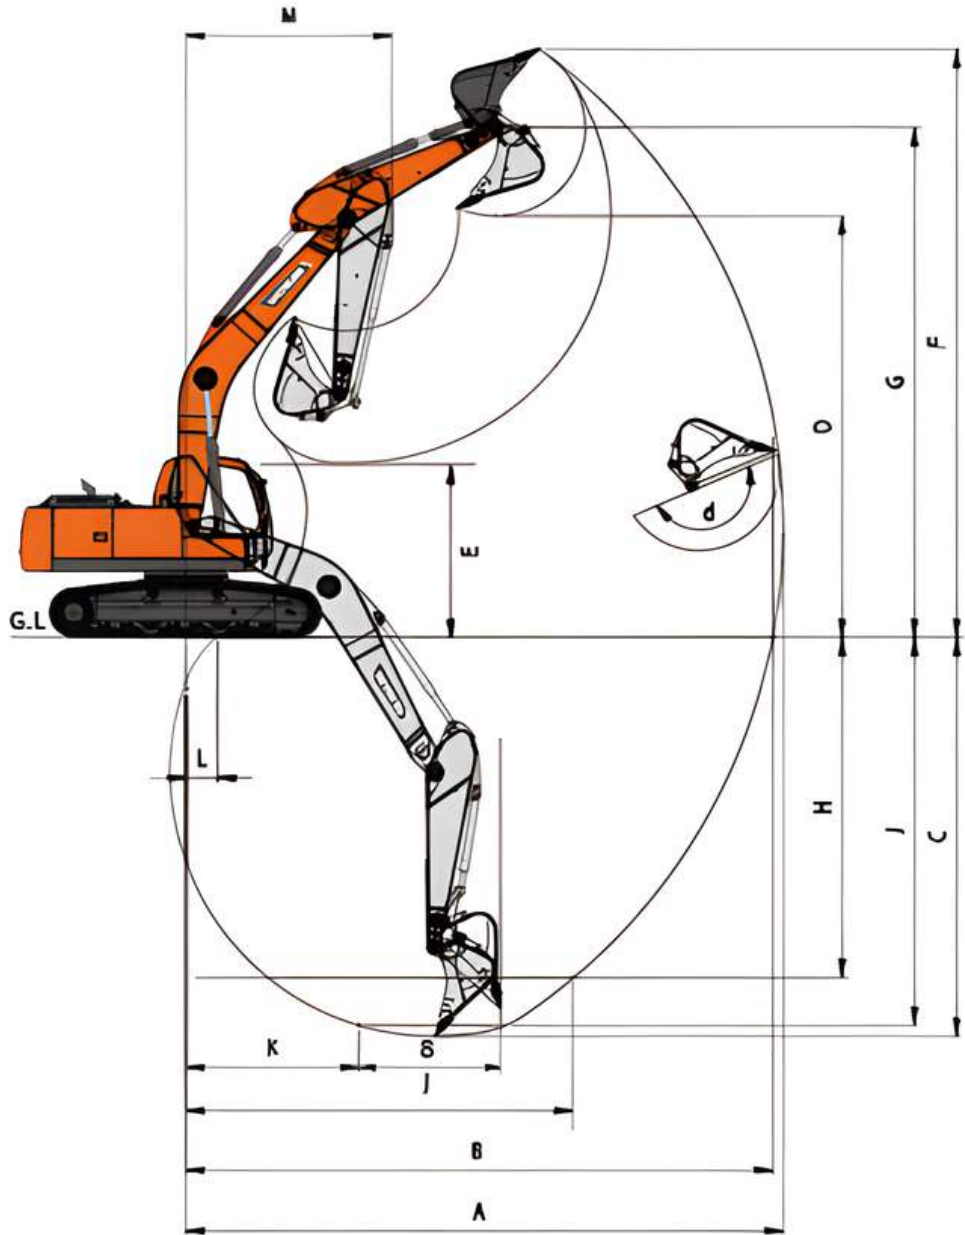

WORKING RANGES

Working range	Unit	OPT1	OPT2	OPT3	OPT4
A. Max. Digging Reach	mm	10,540	11,020	11,930	10,235
B. Max. Digging Reach (at Ground Level)	mm	10,325	10,920	11,740	10,020
C. Max. Digging Depth	mm	6,885	7,485	8,290	6,670
D. Max. Dumping Height	mm	8,605	7,220	7,635	6,640
E. Min. Dumping Height	mm	3,380	2,755	2,000	3,105
F. Max. Digging Height	mm	9,910	10,215	10,815	9,585
G. Max. Bucket Pin Height	mm	8,605	8,875	9,335	8,295
H. Max. Vertical Wall Digging Depth	mm	3,715	4,020	6,830	3,525
I. Max. Digging Radius	mm	8,760	9,265	9,985	8,530
J. Digging Depth (Flat Level)	mm	6,650	7,295	8,156	6,430
K. Min. Digging Radius	mm	3,260	3,310	3,380	3,045
L. Max. Digging Distance	mm	2,245	795	-290	1,825
M. Min. Swing Radius	mm	4,445	4,455	4,515	4,325
O. Bucket Angle (Degrees)	(°)	178.4	178.4	178.4	178.4

DIMENSIONS

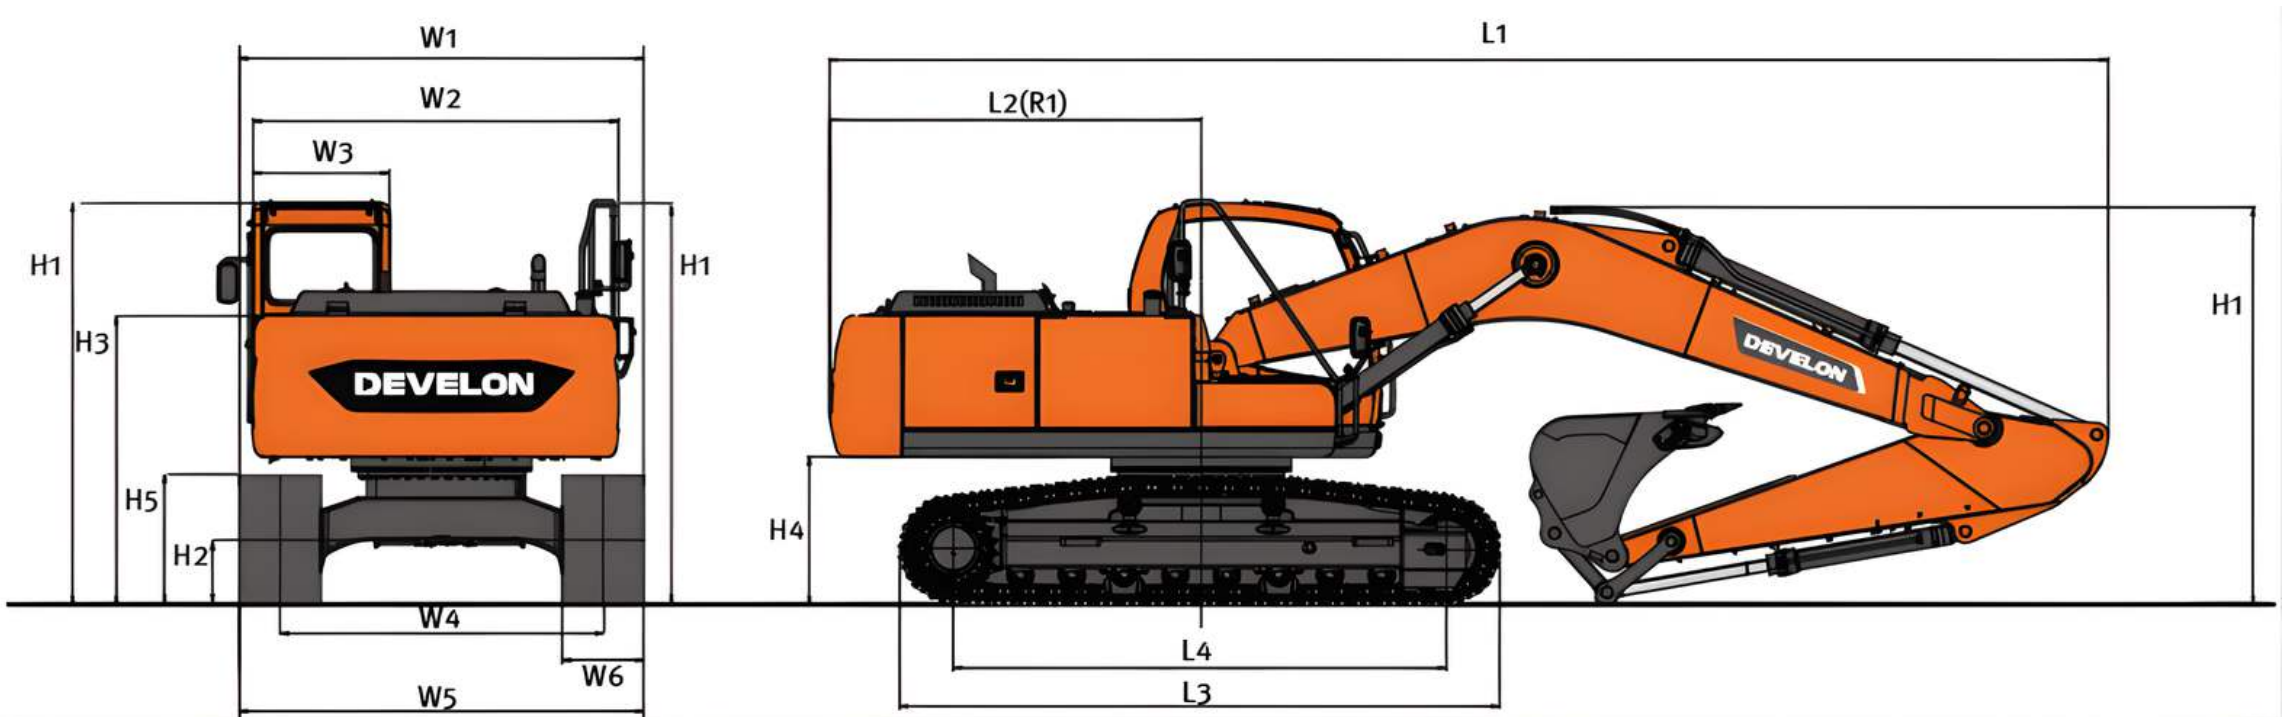

Dimensions	Unit	Standard	OPT1	OPT2	OPT13
Boom	mm	6,500 (HD)	6,500 (HD)	6,500	6,200
Arm	mm	3,200 (HD)	2,600	3,950	2,600
Bucket Capacity	m³	1.81	2.03	1.44	2.03
Undercarriage	mm	Long Track 800	Long Track 800	Long Track 800	Long Track 800
Overall Length	mm	11,315	11,405	11,343	11,105
Overall Height (to Boom Tip)	mm	3,255	3,495	3,315	3,605
Overall Height (to Hydraulic Hose)	mm	3,420	3,640	3,585	3,705
Height (to Top of Cab)	mm	3,100	3,100	3,100	3,100
Overall Width (Shipping)	mm	3,280	3,280	3,280	3,280
Rear Swing Radius	mm	3,530	3,530	3,530	3,530
Ground Clearance	mm	475	475	475	475
Upper Structure Width	mm	2,990	2,990	2,990	2,990
Upper Structure Width	mm	3,103	3,103	3,103	3,103
Cab Width	mm	1,010	1,010	1,010	1,010
Height Above Engine Hood	mm	2,240	2,240	2,240	2,240
Counterweight Ground Clearance	mm	1,180	1,180	1,180	1,180
Track Height	mm	970	970	970	970
Track Overall Length	mm	4,980	4,980	4,980	4,980
Distance Between Front Idler and Sprocket	mm	4,040	4,040	4,040	4,040
Track Gauge (Center-to-Center)	mm	2,680	2,680	2,680	2,680
Undercarriage Width	mm	3,280	3,280	3,280	3,280
Track Shoe Width	mm	800	800	800	800
Grouser / Shoe Height	mm	38	38	38	38
Cab Step Height	mm	853	853	853	853



A shortcut to long-term profitability by reducing costs and maximizing uptime. Easy to operate and simple to repair. Regular equipment inspection and maintenance are essential to maintain peak performance and maximum productivity. Centralized greasing points are designed for easy, hassle-free routine maintenance.

CONTACT US

Siam Sun Autosales CO.,LTD.
99 Song Khanong Subdistrict Sam Phran District,
Nakhon Pathom Province 73210
sales.admin@siamsunautosales.com
Tel. +66 81 378 5151
www.siamsunautosales.com



@siamsun