

DEVELON



DEVELON

DX530LCA

Crawler Excavator

FOR SALE



Operating Weight 52,300 kg



Bucket Capacity 3.6 m³



Rated Power 400 HP / 1,800 rpm

Siam Sun Autosales CO.,LTD.

99 Song Khanong Subdistrict Sam Phran

District, Nakhon Pathom Province 73210


sales.admin@siamsunautosales.com

Tel. +66 81 378 5151

www.siamsunautosales.com




Develon XGMA by Siam Sun



[siamsunautosales](https://www.tiktok.com/@siamsunautosales)



Develon XGMA by Siam Sun



[@siamsun](https://www.line.me/@siamsun)



[@siamsun](https://www.line.me/@siamsun)


DX530LCA

Crawler Excavator

SPECIFICATION

Description	Unit	
Operating Weight	kg	52,300
Bucket Capacity	m ³	3.6
Battery		2 X 12 V / 150 Ah
Starter Motor		24 V / 6 kW
Engine	Unit	
Model	-	Develon DX12 (Direct Injection)
Rated power	HP / rpm	400 / 1,800
Max. Travel Speed	km/h	5.5 / 3.1
Fuel Tank Capacity	Liter	626
Cooling System	Liter	54
Engine Oil	Liter	45
Hydraulic Tank	Liter	390

DIMENSIONS

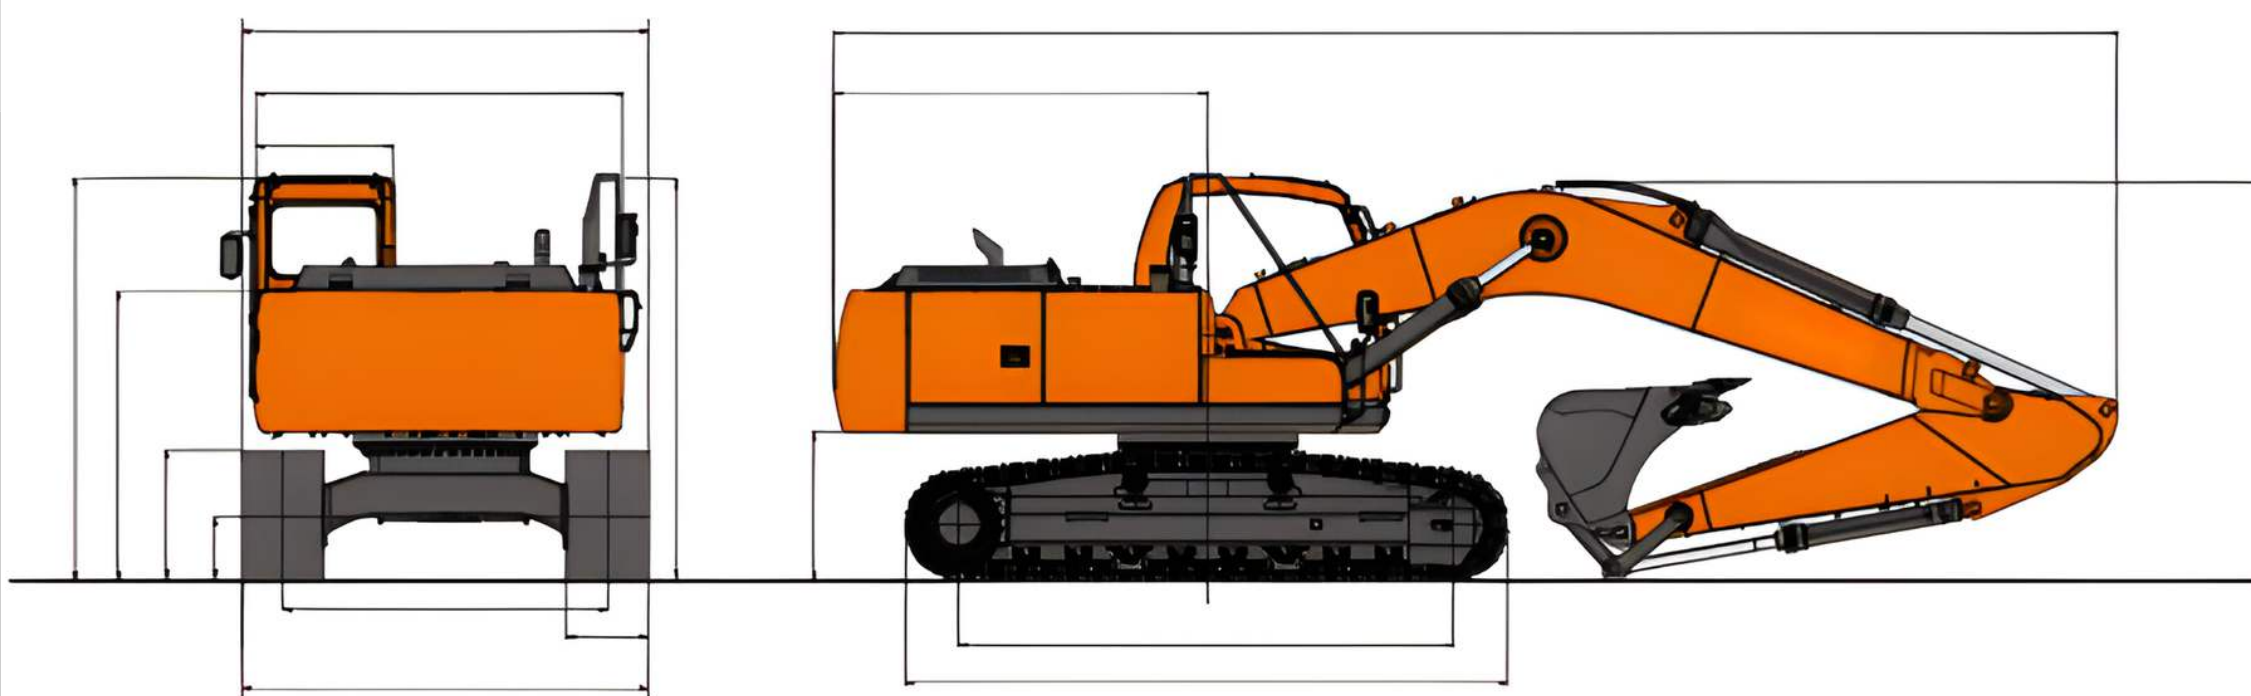

Model				DX530LC-7M (metric)							
Dimension				STD	OPT1	OPT2	OPT3	OPT4	OPT5	OPT6	
Boom			m	6.3	6.3	7.1 HD	7.1 HD	7.1	9.0	11.0	
Arm			m	2.9	2.4	3.35 HD	2.9	3.98	6.0	8.0	
Bucket (PCSA)			m ³	3.28 R2H	3.2	2.35/2.6 R2H	2.6/2.72 R2H	2.07 R2H	1.27 GP	0.92 GP	
Undercarriage (Track+Grouser)			mm	3.9 M 600 TG							
Overall	L1	Overall Length	mm	11,530	11,720	12,220	12,325	12,300	14,150	16,190	
	H1	Overall Height	Boom	mm	4,140	4,030	3,575	3,775	3,830	3,765	3,935
			Hose	mm	4,185	4,075	3,680	3,865	3,920	3,905	4,070
			Cabin	mm	3,360	3,360	3,360	3,360	3,360	3,360	3,360
	W1	Overall Width (SHIPPING)**	Extended	mm	4,100	4,100	4,100	4,100	4,100	4,100	4,100
			Retracted	mm	3,577	3,577	3,577	3,577	3,577	3,577	3,577
	R1	Rear Swing Radius	mm	3,800	3,800	3,800	3,800	3,800	3,800	3,800	
	H2	Ground Clearance*	mm	*725	*725	*725	*725	*725	*725	*725	
Swing Body	W2	House Width	Frame only	mm	2,990	2,990	2,990	2,990	2,990	2,990	
			w/Catwalk	mm	3,296	3,296	3,296	3,296	3,296	3,296	
			w/Protector	mm	3,352	3,352	3,352	3,352	3,352	3,352	
	W3	Cabin Width	mm	1,010	1,010	1,010	1,010	1,010	1,010	1,010	
	H3	Height Over Cover	mm	2,507	2,507	2,507	2,507	2,507	2,507	2,507	
Undercarriage	H4	Counterweight Clearance*	mm	*1,424	*1,424	*1,424	*1,424	*1,424	*1,424	*1,424	
	H5	Track Height*	mm	*1,195	*1,195	*1,195	*1,195	*1,195	*1,195	*1,195	
	L3	Track Length	mm	*5,480	*5,480	*5,480	*5,480	*5,480	*5,480	*5,480	
	L4	Tumbler Distance	mm	4,470	4,470	4,470	4,470	4,470	4,470	4,470	
	W5	Undercarriage Width***	Extended	mm	4,100	4,100	4,100	4,100	4,100	4,100	
			Retracted	mm	3,540	3,540	3,540	3,540	3,540	3,540	
	W6	Shoe Width	mm	600	600	600	600	600	600	600	
	Grouser Height	mm	36	36	36	36	36	36	36		
CAB	-	Cabin Height (H1' - H3)	mm	853	853	853	853	853	853	853	



Access panels designed for service and maintenance enhance safety and convenience during inspection and repair work.

- Hydraulic Oil: 4,000 hours
- Engine Oil Filter: 500 hours
- Engine Oil: 500 hours




Human-Centric Engine Hood Design

- The engine hood is designed with human-centric principles. Unlike previous single-piece hood designs, it consists of 3 independently movable parts for greater durability and flexibility.
- Components requiring regular service are consolidated near the main pump compartment, making part removal and maintenance much easier.



Handrails & Anti-Slip Plates

Additional handrails and anti-slip covers, along with an expanded platform access area, provide greater convenience and safety for operators during routine maintenance.

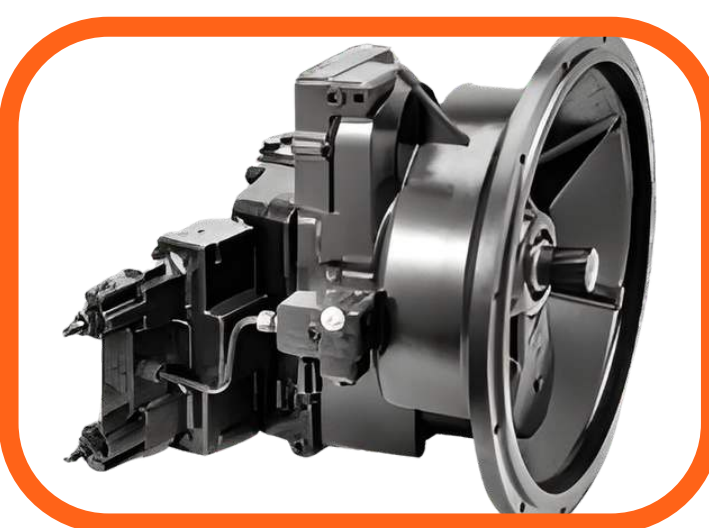

HYDRAULIC PUMP (Virtual Hydraulic Flow)

- Reduces fuel consumption while effectively increasing production efficiency.
- The control system allows front-attachment movement speed to adjust according to hydraulic flow demand.
- Enhanced operability ensures smooth and precise linear movement, with hydraulic flow easily controlled via push-buttons or intuitive switches.



Removable Engine Cover & Service Steps

- Equipped with a removable engine cover and service ladder/steps to facilitate easier field repairs. High component versatility also leads to lower replacement costs.



Fuel Tank Cap with Double Lock Mechanism

- Two-stage locking mechanism on the fuel cap helps prevent fuel theft from the tank.



Windshield Washer Reservoir

- Increased washer fluid tank capacity (doubled capacity) allows for larger fluid storage and extended use.

CONTACT US

Siam Sun Autosales CO.,LTD.
99 Song Khanong Subdistrict Sam Phran District,
Nakhon Pathom Province 73210
sales.admin@siamsunautosales.com
Tel. +66 81 378 5151
www.siamsunautosales.com



@siamsun